




“Tumble Tot” Loose or Poured-in-Place Playground Surfacing

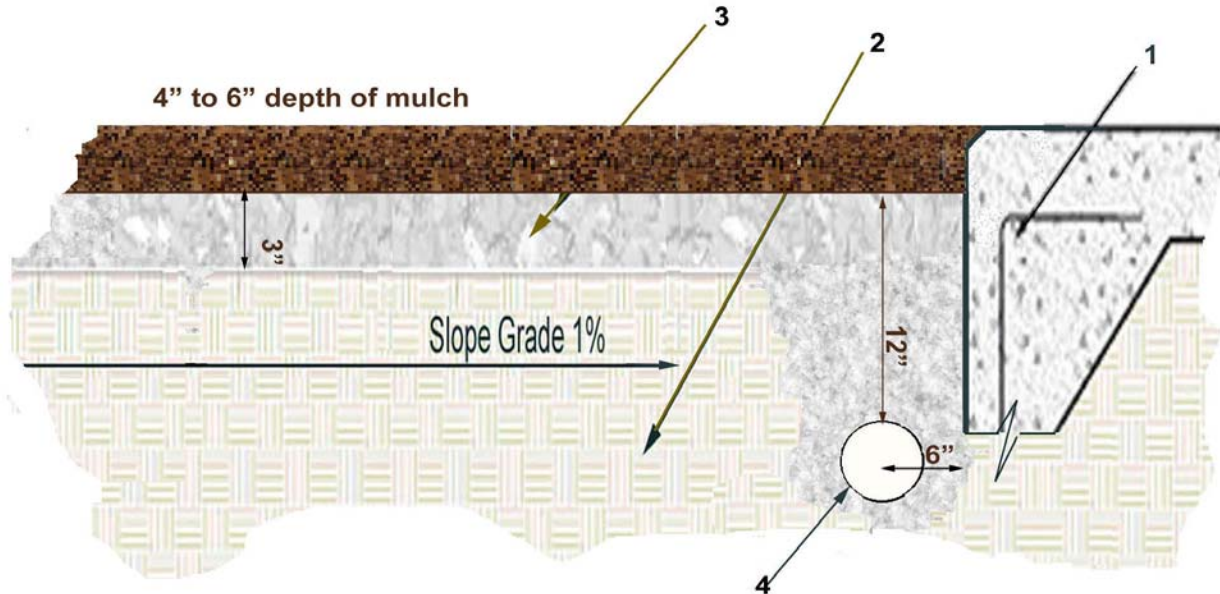

**PolyStar “Tumble Tot” Rubber Mulch Loose
or Poured-in-Place Playground System Detail**

Contact PolyTurf Inc. (949)551-4696 info@sustainableurfacing.com

1. Concrete curb to client's specifications or prefabricated recycled rubber curbing.
2. Compacted Sub-grade per structural soils report.
3. 4" crushed miscellaneous, Class 2, base with 95% compaction. PolyDrain water diversion mat over sub-base (optional)
4. 4" drain tile to recovered water facility, approximately 12" deep, 6" from curb.
5. Sub-grade sloped minimum 1% to 3% to drain from all directions.
6. MATERIAL SPECIFICATION: +4 mesh (free of steel or fiber) 1/2" – 3/4" in size.
7. FEATURES: Does not leach, chemically safe for children, pets and plants
Does not deteriorate
Does not float
Non-Toxic
Does not attract insects
Anti-fungal, anti-microbial protection

Mulch Bark 100% recycled PTE tires.

8. COLOR; 5 year warranty.
Mulch Shred
Red, Green, Sandstone Brown.
Mulch Bark
Brown, Brick Red, Cypress, Green

9. TESTING; Meets and exceeds ASTM F 1292-96 "Standard Specification for Impact Attenuation of Surface Systems Under and Around Playground Equipment" for 4, 6, 8, and 10' fall height requirements

Meets and exceeds ASTM F 1951-99 "Surface Accessibility Test" for ADA accessibility

Showed negligible or no change in color when subjected to the "Colorfastness to Light (Xenon)" test for a period of 5 years

10. FALL HEIGHTS: 4" – LESS THAN 5' - 6" UP TO 10'

11. QUANTITIES; Depth x 1.5 = lbs/square foot.

12. The system can be used either dry or loose or mixed with binder and Poured-in-Place.

4000 Barranca Parkway, Suite 250, Irvine, CA 92604 Tel: 949.551.4696